

Yana Yaylanan Zincir





roller chains

american / European series



GURUR ZİNCİR

www.gururmakina.com.tr

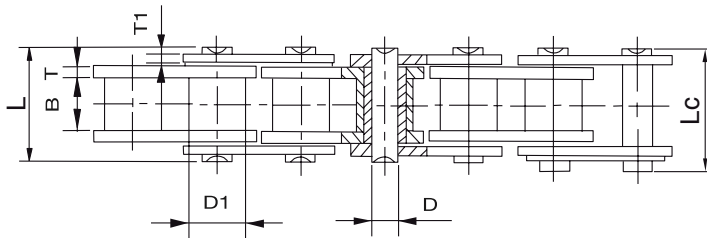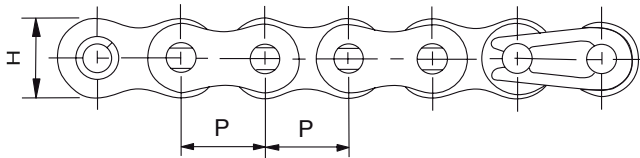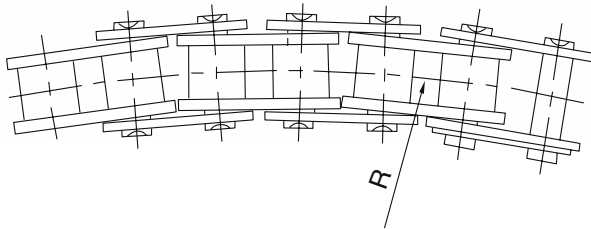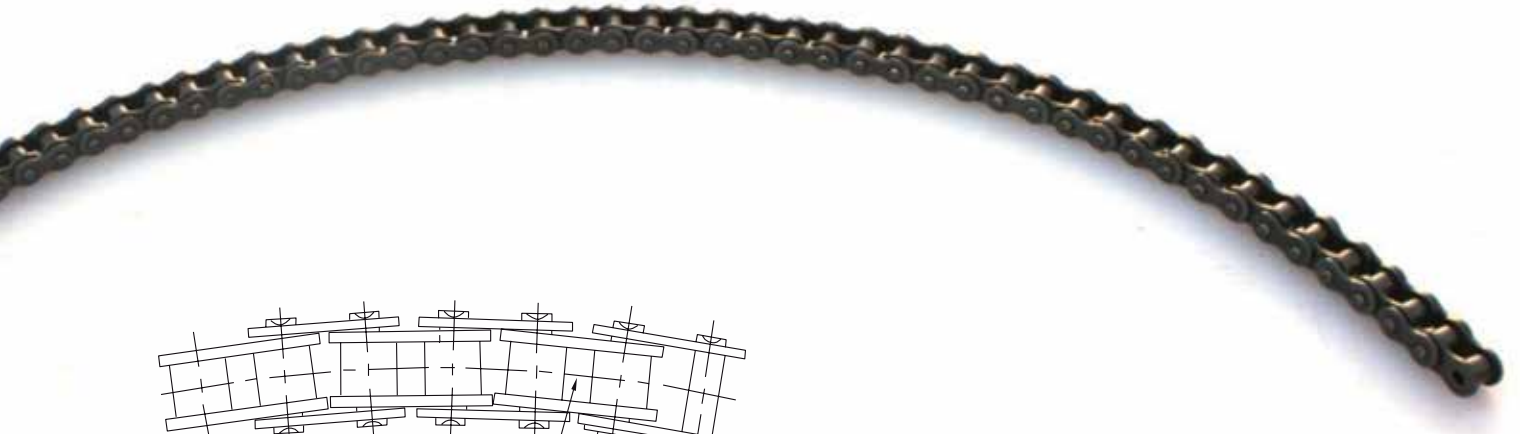

Reference	Pitch	Inner width	Roller diameter	Pin diameter	Pin length		Plates width	Plates thickness	Side bow radius	Breaking load	Weight per meter
ANSI/ISO	P	B min	D1 max	D max	L max	Lc max	H max	T/T1 max	R min	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	Kg/m
40SB	12,700	7,85	7,95	3,96	16,90	18,10	11,70	1,50	350,00	13,80	0,80
50SB	15,875	9,40	10,16	4,37	20,70	22,70	14,90	2,03	400,00	20,60	1,09
60SB	19,050	12,57	11,91	5,34	26,60	28,40	18,00	2,42	500,00	15,70	1,54
80SB	25,400	15,75	15,88	7,19	34,00	37,30	24,00	3,25	715,00	40,90	2,60
08BSB	12,700	7,75	8,51	3,97	17,40	18,70	11,80	1,60	400,00	14,00	0,70
10BSB	15,875	9,65	10,16	4,50	20,10	21,50	14,70	1,70	400,00	15,60	0,93
12BSB	19,050	11,68	12,07	5,12	23,10	24,80	16,00	1,85	500,00	20,50	1,16
16BSB	25,400	17,02	15,88	7,90	36,50	39,70	21,00	3,7/3,0	500,00	55,60	2,53